



BUTTER CHURN

ZI-100 ZI-150 ZI-200 ZI-400 ZI-600 ZI-800

Barrel in inox steel AISI 304.

Baty in cast iron painted with special anti acid paint (models ZI-100, ZI-150 and ZI-200).

Baty in inox steel AISI 304 (models ZI-400, ZI-600 and ZI-800).

In the internal part of the churn a special treatment is archived to avoid the adhesion of the butter to the walls.

Supplied with:

- a glass window to follow the various phases of the butter making;
- wide door in inox steel with hermetic closing;
- tap of unloading of the buttermilk.
- Electric command board


All the gears are mounted on oil lubricated bearings spheres.

Complete of anti accident securities.

Spare parts of greater usury included.

Common technical data:

Electric supply: 3 x220/380 v-50 Hz

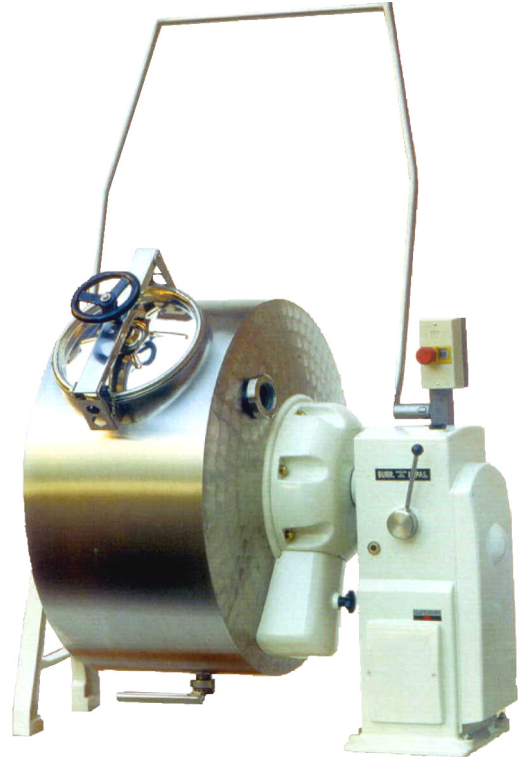

Technical characteristics:

Models	Capacity total (litres)	Capacity cream (litres)	Power (kW)	Dimensions (lxwxh mm)	Weight (kg)
ZI-100	100	35	0,37	1000 x 800 x 900	180
ZI-150	150	55	0,37	1050 x 800 x 900	180
ZI-200	200	70	0,37	1100 x 800 x 925	185
ZI-400	400	140	1,5	1510 x 900 x 1290	390
ZI-600	600	220	2	1660 x 1000 x 1340	420
ZI-800	800	300	2	1780 x 1050 x 1365	460